Stainless-steel body

Adjustable pole height

Large LED display & Function key

PDS

Scanner-Ready Scale

This is the perfect solution for hyper market, convenience store and super market.

- Adjustable pole height
- Various scanners to be built in the scale
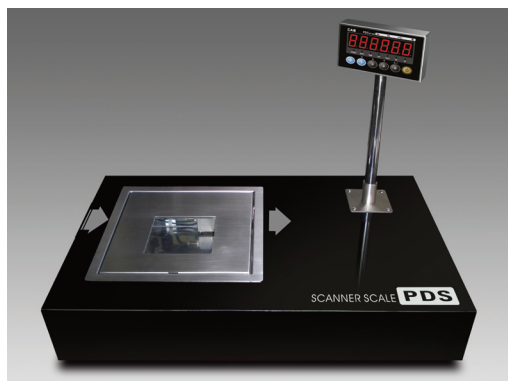- Stainless-steel body

OIML CE

CAS

PDS | **Scanner-Ready** Scale

SPECIFICATIONS

Model	PDS	
Max. capacity (kg)	15	30
Min. capacity (g)	100	200
e = d =(g)	5	10
Tare	-14.995	-29.99
Display type	LED (6digits)	
Character size (mm)	25 (Height)	
Lamp	STABLE, ZERO, TARE, G/N, HOLD, kg, lb	
Power	AC 220V (DC 9V, 500mA)	
Operating temperature	-10˚C ~ +40˚C	
Platter size (mm)	299(W) X 299(D) X 20(H)	
Dimension (mm)	348(W) X 348(D) X 121.2(H)	
Product weight (kg)	10	

FEATURES

- Stainless-steel body
- Semi-permanent structure
- Easy-to-read LED display (25mm large display)
- Auto zero tracking
- High accuracy loadcells
- RS-232C interface

CAS

CAS BLDG., # 440-1, SUNGNAE-DONG, GANGDONG-GU, SEOUL, KOREA

TEL_ 82 2 2225 3500
FAX_ 82 2 475 4668

http://www.globalcas.com

Specifications are subject to change for improvement without prior notice.

Adjustable pole height

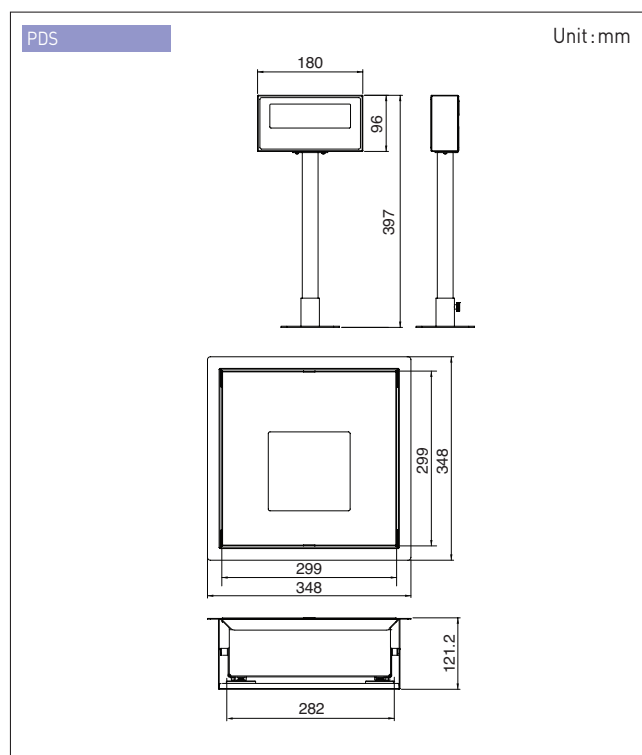- The PDS can be fitted with user's sight by adjusting pole height.

Various scanners to be built in the scale

- Availabe Scanners
  ▸ Metrologic (Honeywell)
    - MS 7620 Horizon, MS860
  ▸ Datalogic
    - Magellan 2300 HS
  ▸ Motorola
    - Symbol LS7808

Unit:mm
244   220
SCANNER
92

▸ Other scanners, which are smaller than 200(W)X224(D)X92(H)mm

DIMENSIONS

PDS   Unit:mm

180
96
397

299
348
299
348

121.2
282

C-11909002